


# ASG series

## DEMOLITION & SORTING GRAPPLES

ASG Grapples can be used in a variety of applications including demolition of wooden structures, scrap handling, loading, sorting and others.

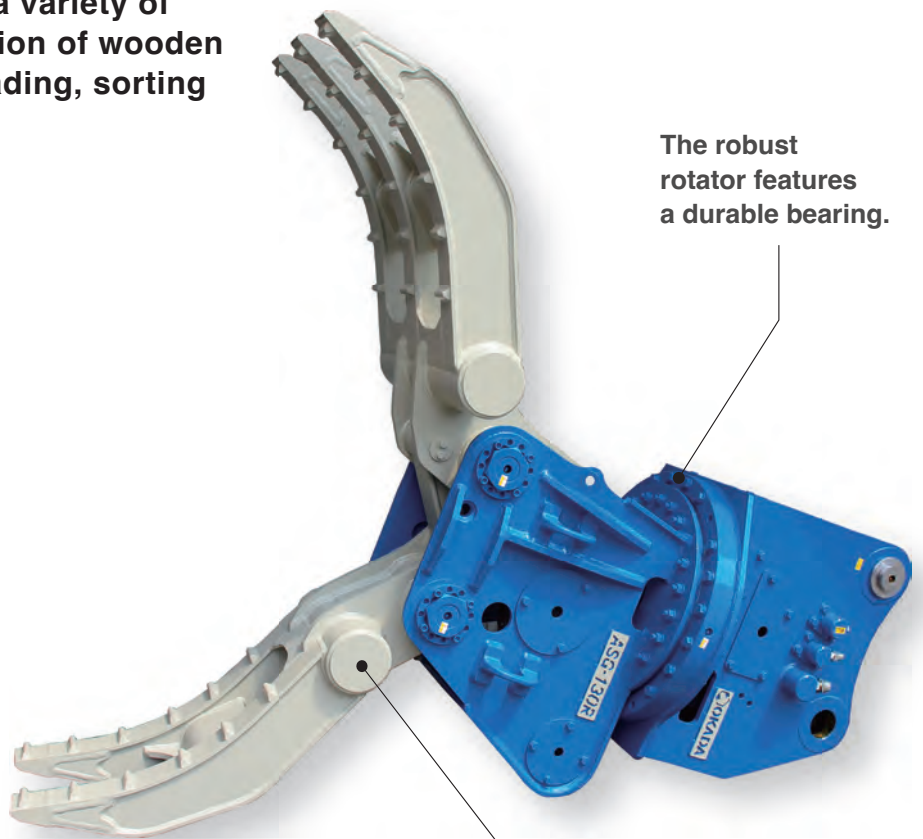

The robust rotator features a durable bearing.

A powerful hydraulic motor allows easy rotation long, heavy objects.

### ◆ Specifications

	Unit	ASG-35R/RDF	ASG-60R/RDF	ASG-130R/RDF	ASG-210R/RDF
Operating Weight	kg	230/235	530/555	950/990	1595/1675
Overall Length	mm	1455	1915/1930	2195/2255	2645/2690
Max. Claw Opening	mm	1145	1660	1830	2335
Claw Width (3/2)	mm	295/155	480/270	600/340	800/460
Claw Length	mm	650	865	955	1200
Excavator Set Pressure	MPa	25	28/25	28	28/25
Suitable Carrier Range	Ton	3 - 5	6 - 9	10 - 16	18 - 25

(Note) The above specifications are subject to change without notice. The above specifications assume the use of an OKADA universal pin mount. Solenoid valve is installed on ASG-30RD and ASG-130RDF. (It is used in breaker piping.)