
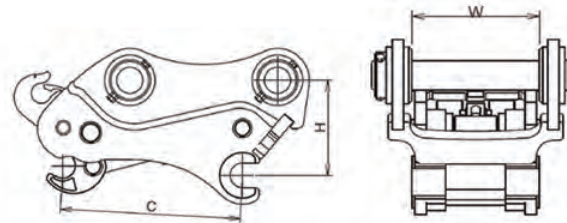


OKH series QUICK COUPLERS

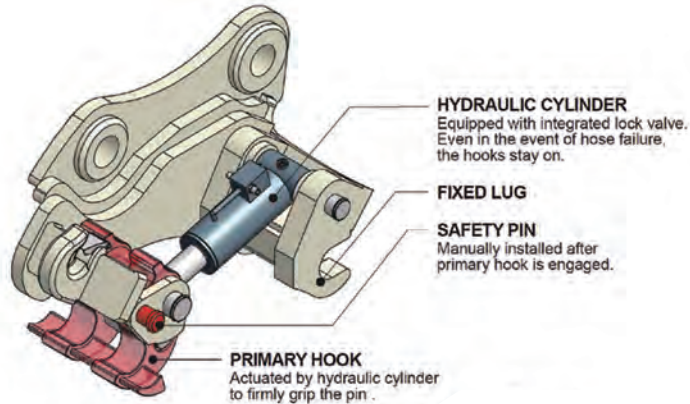

◆ Specifications

	Unit	OKH-20	OKH-45	OKH-60	OKH-80	OKH-150	OKH-250	OKH-300	OKH-400
Operating Weight	kg	26 - 34	32 - 49	60 - 75	70 - 91	175 - 210	270 - 350	470 - 550	650 - 700
Pin center (C)	mm	83 - 155	135 - 220	220 - 310	240 - 390	360 - 450	380 - 535	475 - 513	530 - 585
Pin Height (H)	mm	145 - 165	150 - 170	145 - 165	175 - 183	220 - 240	285 - 290	330 - 335	385 - 395
Width (W)	mm	95 - 119	122 - 150	150 - 172	160 - 200	218 - 275	305 - 340	346 - 411	371 - 442
Pin Diameter	mm	30	40	45	50	65	80	90	100 - 110
Suitable Carrier Range	Ton	1.5 - 1.8	2.0 - 3.8	4.0 - 5.5	6.0 - 8.0	9.0 - 15	18 - 23	24 - 30	30 - 40

(Note) The above specifications are subject to change without notice. The weight varies depending on the type of excavator. The pin center (C) above varies per model of carrier machine.