


TS-S series MULTI CRUSHERS

TS-S multi-crusher processes both reinforced concrete and steel structure.



The special casting alloy used delivers a lightweight crusher with superior durability.

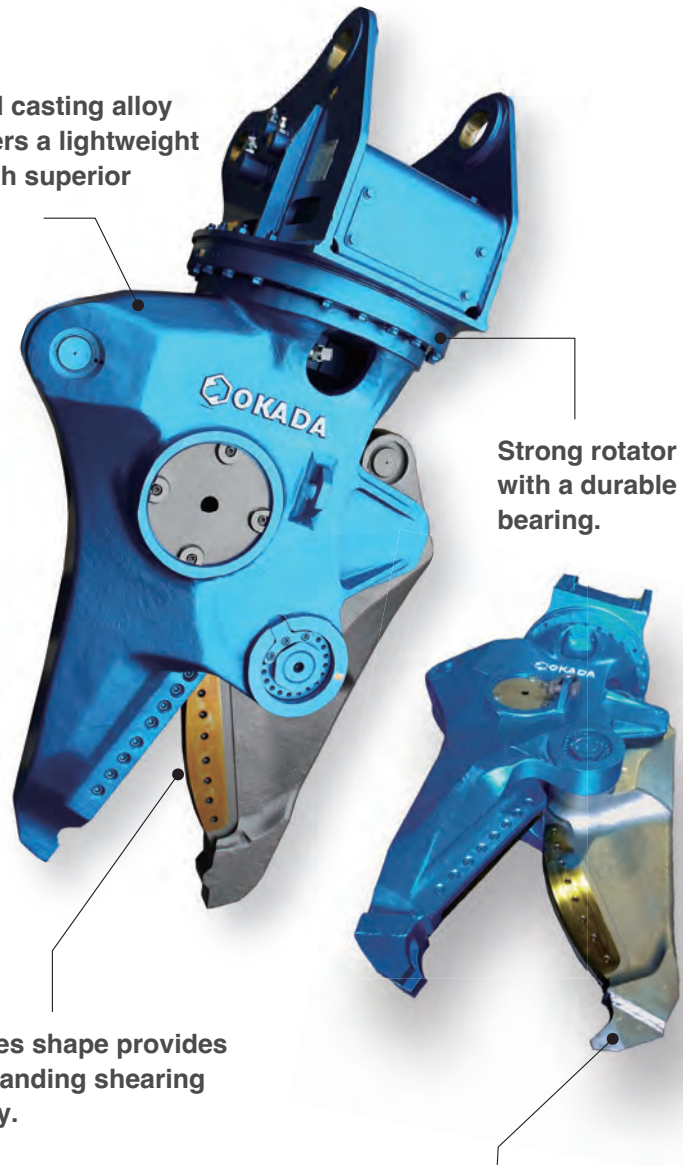

Strong rotator with a durable bearing.

Curves shape provides outstanding shearing ability.

Teeth for processing concrete (optional).

◆ Specifications

		TS-S250C	TS-S320C	TS-S430C	TS-S550C	TS-S660C
Rotation Type		FR/ARTS/HR	FR/ARTS/HR	FR/ARTS/HR	FR/ARTS/HR	FHR
Operating Weight	kg	280/325/330	755/775/775	1395/1475/1455	2420/2520/2500	3755
Overall Length	mm	1155/1255/1255	1630/1635/1630	2055/2195/2195	2445/2590/2550	2835
Overall Height	mm	605	875	1115	1400	1618
Max. Jaw Opening	mm	325	475	565	690	815
Max. Blade Opening	mm	220	340	400	515	630
Cutter Blade Length	mm	220/250	320/380	420/500	550/600	660/720
Cutting Force (at inner part)	kN	405	745	1080	1910	2310
Excavator Set Pressure	Mpa	25	28	30	35	35
Speed Valve		-	-	-	-	-
Suitable Carrier Range	Ton	3 - 5	6 - 13	10 - 25	20 - 35	30 - 50

(Note) The above specifications are subject to change without notice.
The above specifications assume the use of an OKADA universal pin mount.