


TS-W series CUTTERS

Processes steel frame structure.

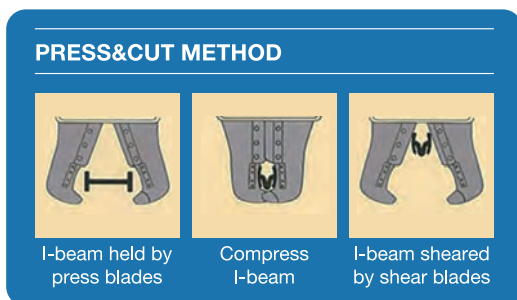

◆ Specifications

	Unit	TS-WB600CV	TS-WB700CV	TS-WB800CV	TS-WB900CV	TS-WB1000CV	TS-WB1150CV
Rotation Type		FR/ARTS/HR	FR/HR/FHR	FHR	FHR	FHR	FHR
Operating Weight	kg	2620/2720/2700	3980/4010/4020	5260	7400	9340	11000
Overall Length	mm	2530/2680/2640	3050	3340	3880	4170	4460
Max. Jaw Opening	mm	710	930	1050	1190	1370	1600
Overall Width	mm	1680	1650	1950	1940	2400	2360
Cutter Blade Length	mm	600	700	800	900	1000	1150
Cutting Force(Center)	kN	2300	2710	3000	3460	3675	3650
Excavator Set Pressure	Mpa	35	35	35	35	35	35
Speed Valve		YES	YES	YES	YES	YES	YES
Suitable Carrier Range	Ton	20 - 35	30 - 50	40 - 70	60 - 100	100 - 200	150 -

(Note) The above specifications are subject to change without notice.
The above specifications assume the use of an OKADA universal pin mount.